




1 Remove Grate

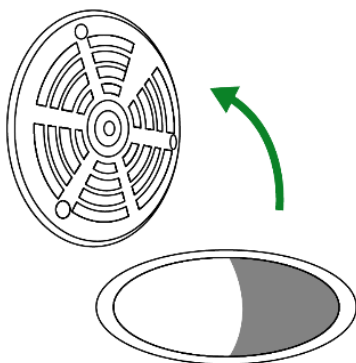


2 Insert Green Drain™

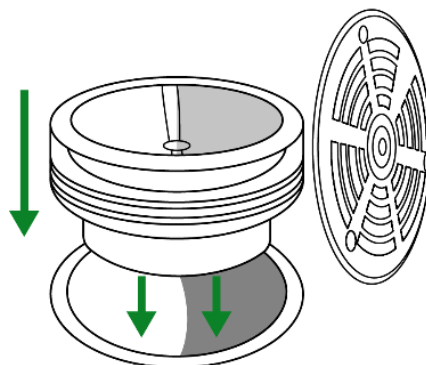



3 Recess 2" to 4" Into The Physical Pipe

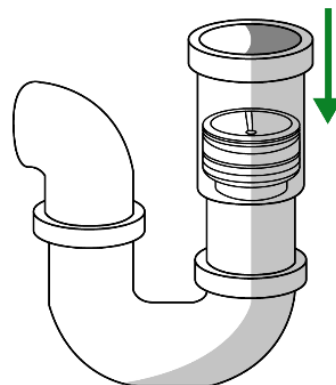

4 Close Grate

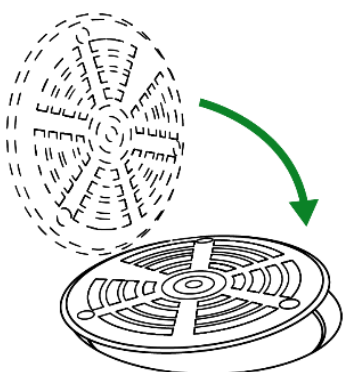

5 Fasten Screws

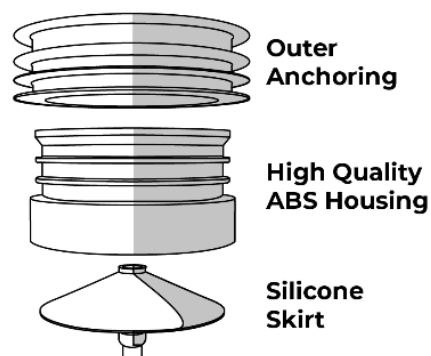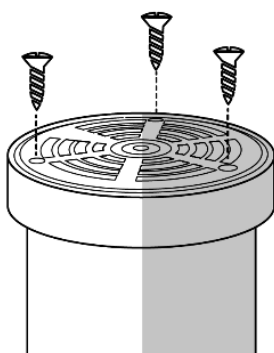

Installation of Green Drain for APAC Region as per WMTS-522:2021

The sealing device is not to be used as an alternative to a water seal trap. The sealing device is not to be used as an alternative to a water seal trap. B) The product should not be removed from the packaging until it is to be installed. C) The product shall not be installed into an overflow relief gully (ORG), or a puddle flange. D) This product shall be installed clear of the following potential obstructions: (i) any existing water seal level within a trap, (ii) any inlets to a riser and, (iii) any above ground soil, waste and drainage pipe collars. E) For product warranty details please see <https://greendrains.com/manufacturer-warranty/> F) Please see specifications please see <https://greendrains.com/specifications-pack> G) Limitations of pipe and recommended maintenance. (i) Access to pipe, clear of any obstructions e.g. excess cement overhangs (ii) Not to be used in conjunction with corrosive/harsh chemicals. (iii) Temperature between -10° Celsius and 100° Celsius. (iv) Recommend for product seal to be checked in line with venue's maintenance protocol and cleaned under warm soapy water. Installation to be undertaken by a licensed practitioner or competent person.